

ELECTRIC ALL-TERRAIN LITTER VACUUM

# LR50 V=V/

Lithium battery pack with up to 9 hours autonomy









www.madvac.com

### From concrete to grass, the electric LR50 can tackle all types of urban terrain with ease

- Parks
- Sidewalks
- Bike & pedestrian lanes
- Parking lots

- Curb side
- Alleys
- Pathways
- Alongside buildings



### LR50 is the perfect allterrain litter solution for

- Cities & municipalities
- Outdoor cleaning contractors
- Airports & seaports
- Transit authorities
- Healthcare services
- Distribution centers
- Shopping malls
- Educational & sports facilities
- Manufacturing facilities
- Amusement parks
- Casinos
- Military
- Correctional facilities







Ergonomic 6-position robotic joystick allows effortless displacement of the boom
















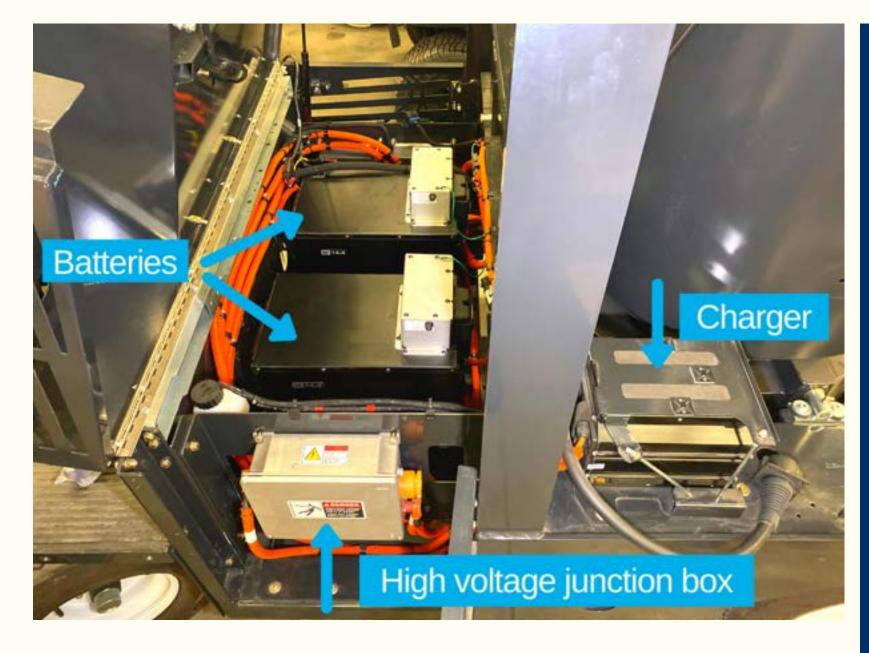

## **Built to suit your needs**

Configure the LR50 according to your specific requirements

- 48 in. (1219 mm) vacuum head
- Retractable wander hose
- Litter collector bags or bagless debris system (Kevlar bin)
- Water mist system (additional dust control)
- Enclosed cab with heated or non-heated windshield and vinyl doors
- Heated seat
- Fan for operator comfort
- Rear-view camera
- Tire flatproofing
- Fire extinguisher

## **Key Attributes**

- LR50 has one of the best compact battery models on the market: Lithium-Ion nickel manganese cobalt (Li NMC) from Zero Motorcycles providing up to 9 hours of autonomy and 3x better "energy per weight and volume" ratio in the industry;
- Approx. 15% lower dB than LR50 diesel model;
- Closed cabin (vinyl doors) with climate control options for operator comfort;
- Robotic vacuum arm with 6-position joystick makes litter picking easy and injury free;
- Productivity 6x faster than manual litter picking;
- Collects litter dry, humid or wet;
- Effortless litter removal using optional 48 in. (1219 mm) wide vacuum head;
- Optional 15 ft. (4.57 m) retractable wander hose for hard-to-reach areas;
- A CDL permit is not required to operate this machine;
- Fully street legal lighting;
- 8 to 10 year lifespan;
- OEM spare parts shipped within 48 hours;
- Madvac has a 35+ years track record of success when your machine is due for replacement we'll still be around.













## Madvac LR50 VEV\*

Power	
Power pack	Lithium-Ion nickel manganese cobalt (Li NMC) high energy capacity, up to 28.8 kWh
Voltage	104 volts battery pack (2 batteries)
Charger	On board charger 6kW
Charger outlet	J1772 level 2, 240V/24A
Charging time	5 hours (15-18 h if 120-v wall socket)
Autonomy	Up to 9 hours

Litter Collection System	
Туре	Straight-through system compacts litter at 2:1 ratio
Litter capacity	75 gal. (284 L)
Container construction	16 gauge powder-coated steel
Vacuum hose	7 in. (178 mm)
Wander hose	Diameter: 6 in. (152 mm);
	length: 15 ft. (4.57 m)
Bagless system	Optional Kevlar bin can be filled and emptied into off-the-shelf bags

#### Frame and Body

- Heavy gauge steel body on a welded 1/4 in. (6.35 mm) structural steel frame
- Electrostatic powder-coated paint

#### Dimensions (\*base model)

Width	48 in. (1219 mm)
Length	99 in. (2515 mm)
Height	100 in. (2540 mm)
Wheelbase	69 in. (1753 mm)
Ground clearance	10 in. (254 mm)





#### Proud manufacturer of the Madvac product line

#### **Telephone:**

• 1-855-651-0444 (toll free - US/Canada)

• 1-450-651-0444 (international)

Fax: 450-651-0447
Email: info@exprolink.com

Address: 2170 Rue de la Province

Longueuil QC Canada J4G 1R7

Website: <a href="https://www.madvac.com">www.madvac.com</a>
Sourcewell (US) and Canoe
(Canada) contract vendor
number: 093021-EXP

#### Data & Performance Information

Vacuum System	
Vacuum rating	Up to 1800 CFM
Controls	
Steering	Power assisted
Propulsion	Forward, neutral, reverse;
	push button shifter

Traction	
Drive	Propulsion with 17 to 1 ratio
Forward speed	12 mph (20 km/h)
Tires (all 4 wheels)	Regular 20.5 in. (521 mm); Turf 20 in. (508 mm)
Brakes	Drum service brakes with electromagnetic parking brake
Gradeability	11.3 degree (20%)
Curb weight	2716 lbs (1232 kg)
Suspension	

## Front Leaf spring Rear Leaf spring

## dB Rating (front) Cabin 85 dB 10 feet away 71 dB





Technical specs are subject to change without prior notice